
Template No.:

BINDING LINE

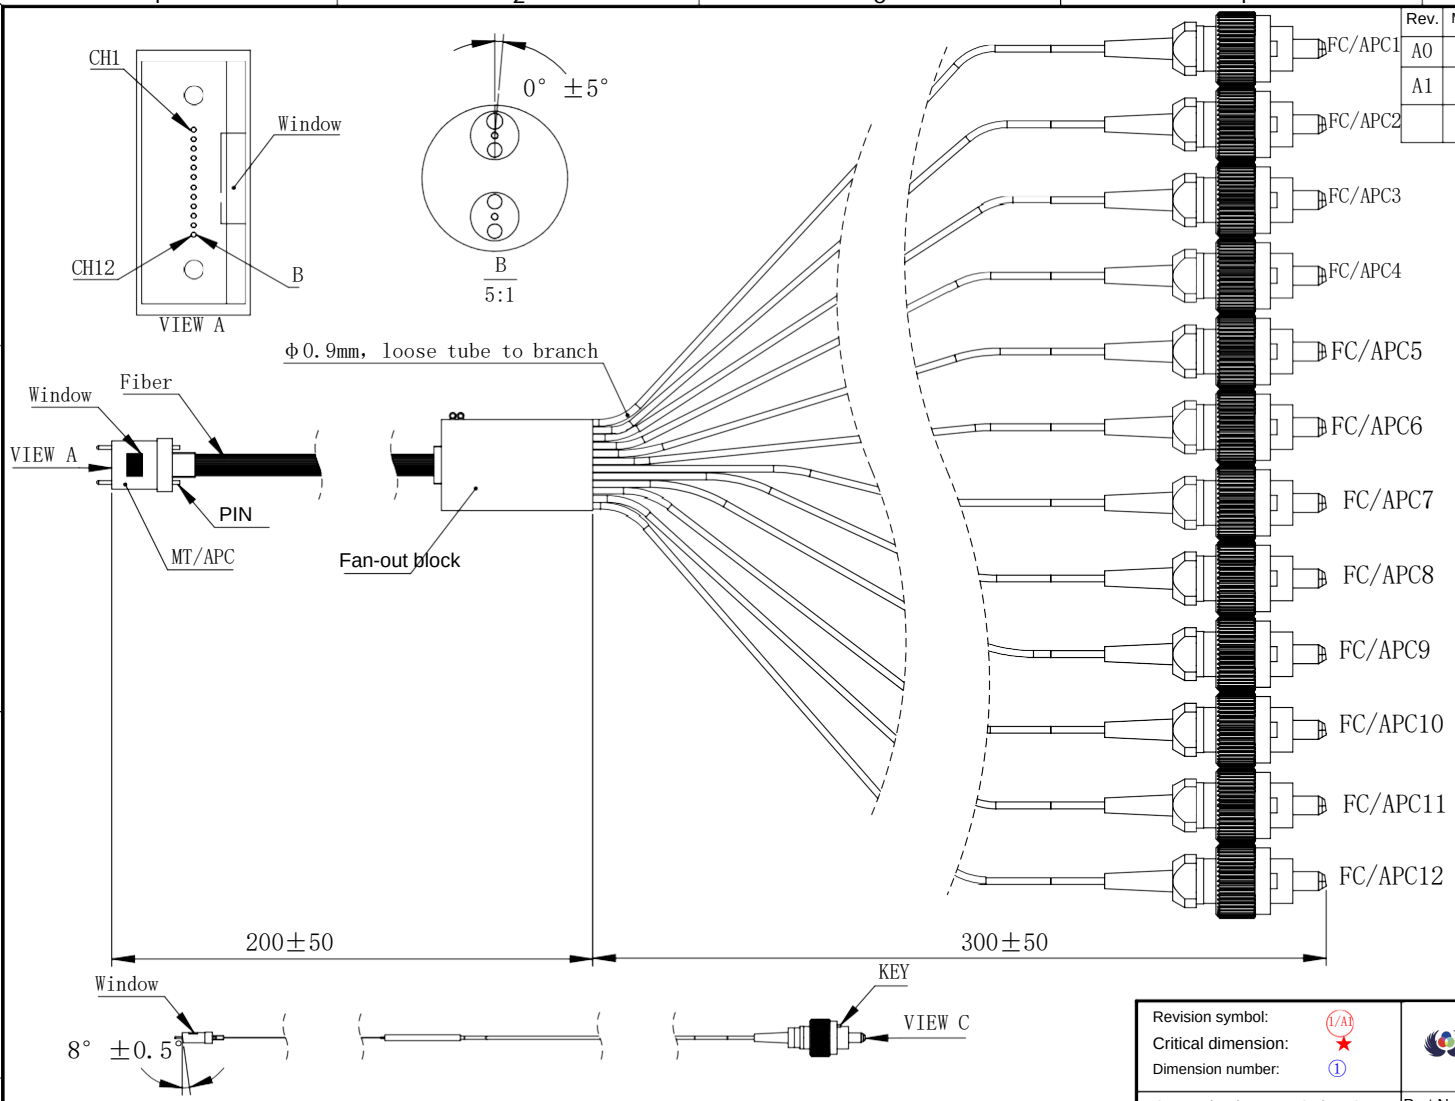


Rev.	Mark	Qty	Revision Description	By	Date
A0	/	/	Initial release	C. Yuan	2026/4/10
A1	/	/	Fiber type updated	C. Yuan	2026/4/15

MT	FC/APC
CH1	FC/APC1
CH2	FC/APC2
CH3	FC/APC3
CH4	FC/APC4
CH5	FC/APC5
CH6	FC/APC6
CH7	FC/APC7
CH8	FC/APC8
CH9	FC/APC9
CH10	FC/APC10
CH11	FC/APC11
CH12	FC/APC12

TECHNICAL REQUIREMENTS:

1. Fiber type: Corning PM13 fiber.
2. Optical performance: FC IL < 0.5 dB; ER >= 20 dB.
3. Operating wavelength: 1330 nm.
4. The 8-degree polishing direction must match the drawing. Polished fiber end faces must be smooth, scratch-free and clean, and meet the fiber end-face requirements.
5. The product must comply with RoHS 2.0.



Revision symbol: 1/A1
Critical dimension: ★
Dimension number: ①

Geometric tolerances: GB/T 1184-H

Linear / angular tolerances unless noted

Units		
mm	X.	±0.20
	.X	±0.15
	.XX	±0.10
	.XXX	±0.05
	.XXXX	±0.02
	Angle	±0.5°

First-angle

Drawings and specifications belong to Jiangsu Aolei Optoelectronics Co., Ltd. No reproduction or use without written permission.

WESTERN OPTRONICS WESTERN OPTRONICS INC.

Part No.: 8108000878

Title: OPTICAL TESTING CABLE
MT- 12X FC/APC TESTING CABLE

Design:	Chenyang Yuan	2026/4/15
Check:	Yushai Miao	2026/4/15
Review:	Yushai Miao	2026/4/15
Process:	Dongmei Wang	2026/4/15
Quality:	Xiaoxian Zhu	2026/4/15
Std.:	Xin Rong	2026/4/15
Approve:	Jinggu Xue	2026/4/15

Drawing No.: WE-Lka7007017

Material:

Stage	Scale	Size
	1:1	A4

Sheet: 1 of 1